

Carmona

Mild Steel



A root or flange mounted exterior bollard luminaire. Constructed from black polyester coated steel tubular body and top cap. Opal or clear polycarbonate injection moulded diffusers and louvre variants offer a range of aesthetic and photometric options. Suitable for use along pathways as well as decorative lighting around buildings and general security.

Strong steel body

Tough polycarbonate diffuser

IP65 ingress protection

Easy access to control gear

50,000 hours life

HILCLARE

LIGHTING MANUFACTURER

— LED BY DESIGN —

a  pilot group company

T: 0161 274 3626
F: 0161 274 3731
E: sales@hilclare.com

15 Carnarvon Street
Manchester
M3 1HJ


Ordering Information

	Code	Weight (kg)	Total Watts	Total Lumens	Luminaire Efficacy	IP Rating	Life	Warranty
14W	BCR94NC14T6LED40	12	14	960	66	IP65	50,000	5 year


Code Builder

Opal diffuser – Replace NC with NO

Dimensions

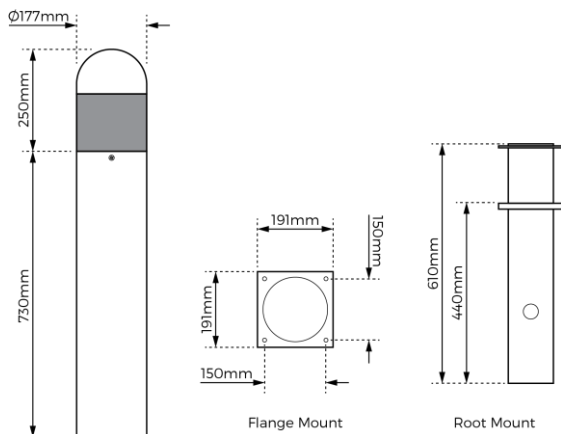

Photometrics

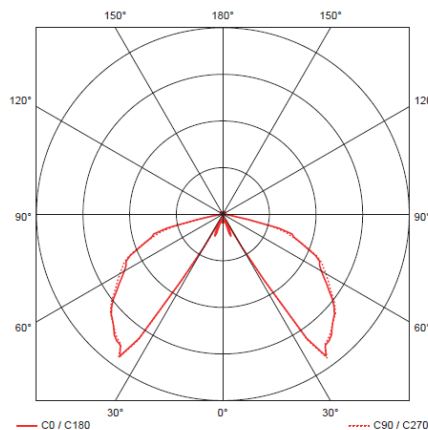

Classification of Protection

Against electric shock Class 1 protected with earthed metalwork. Against ingress of dust and moisture IP65 Technical Specification.

Standards

The Carmona range of luminaires is designed and manufactured to meet the requirements of BSEN 60598 2-1.

Operations

Designed for operation in an exterior environment. Ambient temperature range: 0°C to +25°C for LED version
230V 50Hz nominal input voltage.

Specification

A root or flange mounted exterior bollard luminaire. Constructed from black polyester coated steel tubular body and top cap. Opal or clear polycarbonate injection moulded diffusers and louvre variants offer a range of aesthetic and photometric options. Suitable for use along pathways as well as decorative lighting around buildings and general security.